

# SL 380 Outdoor High Lifter

for indoor and outdoor use

Greater height  
and reach

## High Lifter has a longer reach and higher lifting height

The SL 380 Outdoor High Lifter is designed for jobs that require additional reach and lifting height. The High Lifter easily handles jobs across basement shafts and flower beds and replacement of windows in end walls etc.

*The long arms of the lifting device easily reach heights where panes have been transported across e.g. fences.*

*The long arm reaches easily across obstacles such as basement shafts, flower beds etc.*

*The Smartlift is easily transported in a van or on a trailer*

- Two vacuum circuits with two pumps
- Off road with front-wheel drive and big wheels with electronic brake
- Maneuverable with dual rear wheels
- Lifting height 110 in (center of yoke)
- Ergonomic operation handle
- Waterproof according to ip65
- Foam filled tires

**Smart lift**

# SL 380 Outdoor High Lifter




The Smartlift can be shifted sideways for precision adjustment during installation jobs.

The lifting device has a multifunctional swivel head.



The wide tires make the lifting device suitable for difficult off-road jobs.

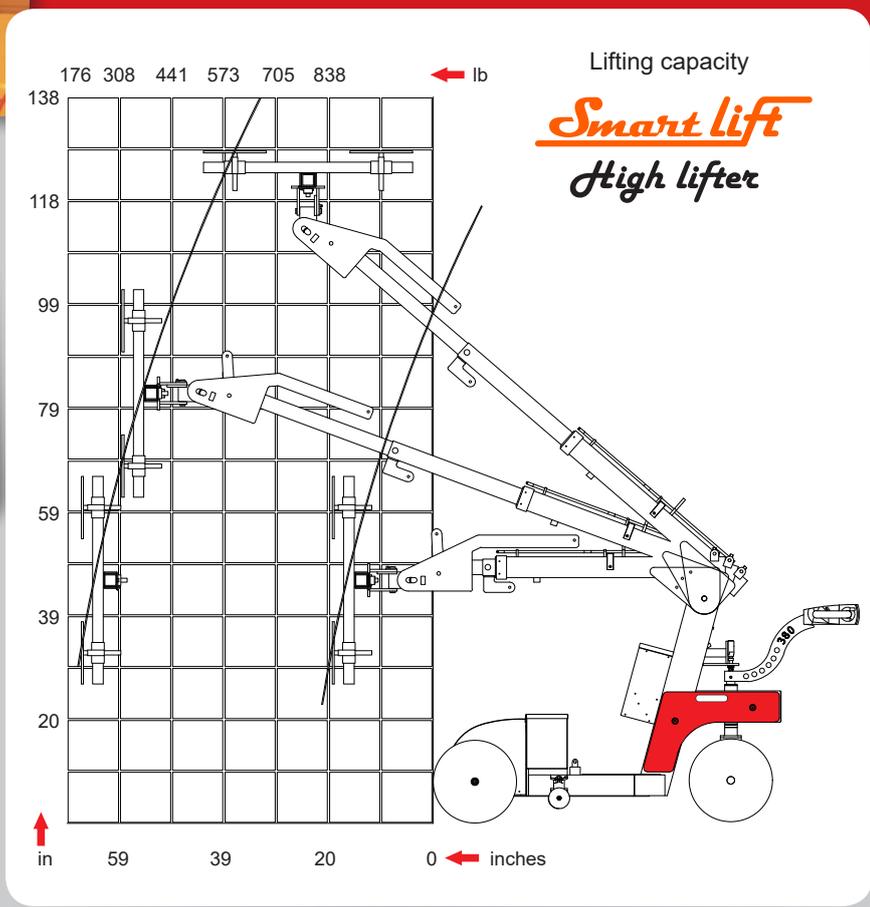

## Technical data

Description	Value
Weight	1499 lb
Height	53.2 in
Width (min)	32.3 in
Length (min)	86.7 in
Extension of arm	23.6 + 23.6 in
Tip from horizontal	45° back og 90° forward
Speedregulation	Stepless high/low
Sideshift	3.9 in
Vacuum system	2-circuits
Lifting height	128 in
Chargingvoltage	115 volt
Integrated charger	Blue Power 24/12
Chargingtime	Approx 8 hours
Battery (2 x 12v) 24 volt	2 x 105 Ah
Runningperiod	Approx 30 hours
Front-wheel drive	1.61 hp
Brake	Elektronisk
Suction pads	4 unit Ø 11.8 mm
Automatic suction	2 vacuum pumps
Lifting capacity arm in/extended (47.3 in)	837 lb/220 lb

